





AGORA SH ARTISAN HUESO SHI410



AGORA SH ARTISAN MINERAL SHI402




AGORA SH ARTISAN PLOMO SHI403



AGORA SH ARTISAN TAUPE SHI404




AGORA SH ARTISAN NACAR SHI401



AGORA SH ARTISAN ARENA SHI409



AGORA SH ARTISAN YUTE SHI408




AGORA SH ARTISAN ROCA SHI407




AGORA SH ARTISAN MARENGO SHI415



AGORA SH ARTISAN GRAFITO SHI416



AGORA SH ARTISAN BRISA SHI405




AGORA SH ARTISAN MUSGO SHI406




AGORA SH ARTISAN HUMO SHI414



AGORA SH ARTISAN ACERO SHI413



AGORA SH ARTISAN NIEBLA SHI411



AGORA SH ARTISAN PERLA SHI412

Composition / Composición

100% Solution Dyed Acrylic

Width / Ancho

160cm

Weight / Peso

450gm/m²

Length of rolls / Longitud de las piezas

30ml

Finish / Acabado

Water repellent, antistain treatment, Safe Home™ finish

Colour fastness to rubbing / Solidez a las tinturas al frote

4-5/5

Colour fastness to chlorinated water / Solidez a las tinturas al agua clorada

5/5

Determination of the tear resistance / Resistencia al desgarró

Warp / Urdimbre 130 N

Weft / Trama 170 N

Breaking Strength / Resistencia a la rotura

Warp / Urdimbre 1800 N

Weft / Trama 2400 N

Resistance to pilling / Resistencia al pilling

4-5/5

Spray test/ Test de spray

4/5


Abrasion resistance (Martindale) / Resistencia a la abrasión (Martindale)

40000 rubs/ciclos

Cleaning instructions / Manutención



Applications / Aplicaciones

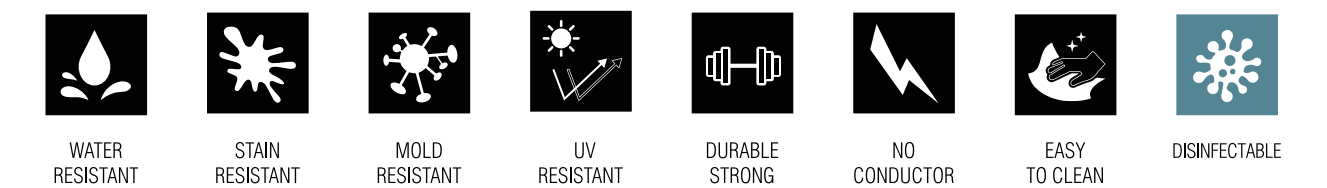

Qualities / Cualidades

